







DT

O-Ring side

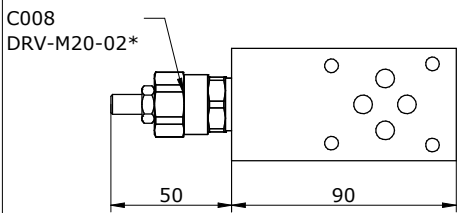




AT

O-Ring side

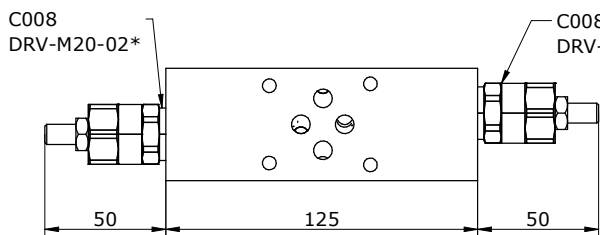

D


O-Ring side

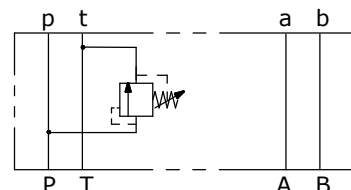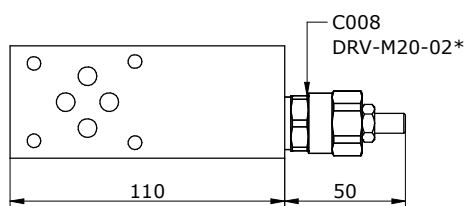





P

O-Ring side

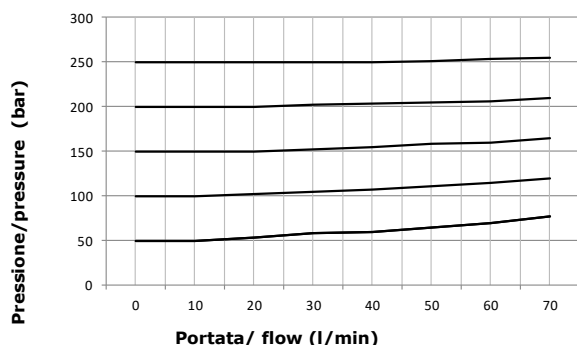PRESTAZIONI
PERFORMANCES



TIPI DI REGOLAZIONI
REGULATION TYPE

	H	VITE CON CHIAVE ESAGONALE (standard) <i>HEXAGONAL HEAD SCREW</i>
	K	POMOLO <i>KNOB</i>
	C	FISSA CON CAPPUCCIO <i>COVER CAP</i>
	I	INVIOLABILE <i>NON ADJUSTABLE</i>

MV_06 - RV - - - - - 10

S = STEEL
A = ALUMINIUM

DT = A vs. T ; B vs. T
AT = A vs. T
D = A vs. B ; B vs. A
P = P vs. T

1 = 5-55 bar
2 = 25-110 bar
3 = 50-215 bar
4 = 100-350 bar
5 = 100-420 bar

SERIES

H = HEAD SCREW
K = KNOB
C = COVER CAP
I = NOT ADJUSTABLE

N = NBR (standard)
V = VITON

*see **CARTDRIGE VALVES** datasheets

Via Nicolò Copernico 12/c-d
 29027 Casoli Di Gariga - Podenzano (PC) Italy

www.oleodinamica2mp.it
 Tel +39 0523 523231
 Fax +39 0523 524509