



FWW

TECHNICAL DATA



- **Flow:** See table
- **Max working pressure:** 210 bar
- **Materials:** Cartridge in Steel zinc plated
- **Version:** Spool Type - Direct Acting
- **Cavity:** See table
- **Installation torque:** See table
- **Weight:** See table

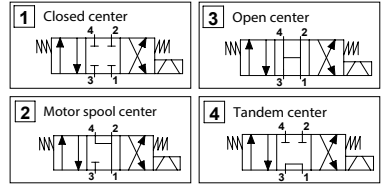

PORTS		
Size	S08	S10
DIMENSIONS		
A	95,4	121
B	54,3	62
C	3/4-16UNF	7/8-14UNF
D	15,8	19
E	14,2	17,4
F	12,6	15,8
Hex.	24	24
Max Flow (l/min)	10	20
Cavity	FW3404000	FW7804000
Installation torque (Nm)	30	40
Weight (kg)	0,190	0,350

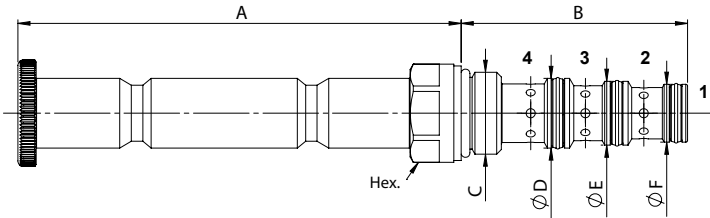

PRESSURE DROP CURVES

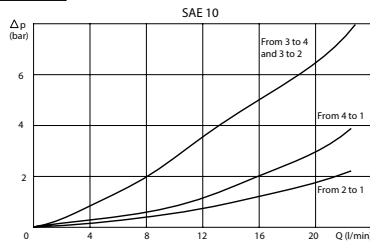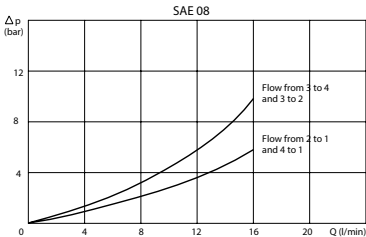

MANUAL OVERRIDE

(EMP)
Push



ORDERING CODE

FWW

Ports Size:

- S08 = SAE 08/4
- S10 = SAE 10/4

Hydraulic Scheme:

- 1
- 2
- 3
- 4

Manual Overrides
(only for S08):

- Omit if not required
- EMP = Push