
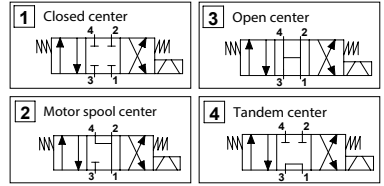




#### TECHNICAL DATA

- **Flow:** See table
- **Max working pressure:** 210 bar (210 bar)
- **Materials:** Aluminium Body (Steel body if required)
- **Version:** Spool Type - Direct Acting
- **Note:** 22W coil for S08 on the page 290  
36W coil for S10 on the page 291

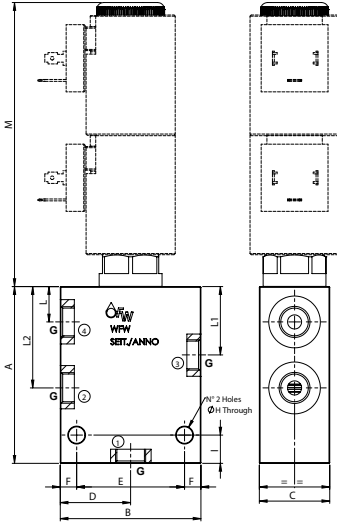

PORTS		
Size	<b>S08</b>	<b>S10</b>
G	1/4	1/2
	3/8	
DIMENSIONS		
A	75	85
B	60	60
C	30	35
D	30	30
E	46	48
F	7	6
H	7	7
I	12	8
L	15,5	18,5
L1	29,5	34,5
L2	43,5	50,5
M	94	120,5
Max Flow (l/min)	10	20

#### PRESSURE DROP CURVES

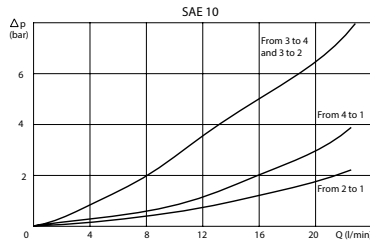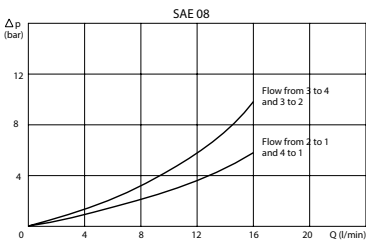

#### MANUAL OVERRIDE

(EMP)  
Push



#### ORDERING CODE

WFW

#### Ports Size:

- S08 = SAE 08/4
- S10 = SAE 10/4

#### Hydraulic Scheme:

- 1
- 2
- 3
- 4

#### Manual Overrides (only for S08):

- Omit if not required
- EMP = Push

#### Ports Size:

- 1/4 ; 3/8
- 1/2

#### Material Body:

- Omit if steel
- A = Aluminium

#### Rated Voltage Coil:

- Omit if not required
- 12
- 24