VALVOLE UNIDIREZIONALI MASCHIO-FEMMINA
MALE – FEMALE CHECK VALVES

NEW

SCHEMA IDRAULICO
HYDRAULIC DIAGRAM

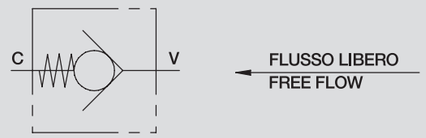

IMPIEGO:
Valvole che consentono il flusso libero in un senso e lo bloccano nel senso opposto, utilizzate per mantenere pressione un impianto idraulico.

MATERIALI E CARATTERISTICHE:
Corpo: acciaio zincato.
Componenti: acciaio temprato termicamente e rettificato.
Guarnizione: solo per V0612/ISO - NBR.

MONTAGGIO:
Collegare V all'alimentazione e C all'utilizzo.
Il flusso passa libero da V a C, ed è bloccato nel senso opposto.

A RICHIESTA
• Solo per V0625 - Pressione di apertura 8 bar.

USE AND OPERATION:
Check valves allow free flow in one direction and blocks the flow in the reverse direction, used to keep a hydraulic system pressurized.

MATERIALS AND FEATURES:
Body: zinc-plated and steel.
Internal parts: hardened and ground steel.
Seals: only for V0612/ISO - NBR.

CONNECTIONS:
Connect V to the supply and C to the function,
Flow is free from V to C and is blocked in the reverse direction.

ON REQUEST
• Only for V0625 - Cracking pressure 8 bar.

CODICE CODE	SIGLA TYPE	PORTATA MAX MAX FLOW L / min	PRESSIONE MAX MAX PRESSURE bar	PRESSIORE APERTURA STANDARD STANDARD CRACKING PRESSURE bar
V0612/ISO	VU MF 1/2" ISO 1179-2	70	350	0,5
V0625	VU MF 3/4"	110	350	3
V0644	VU MF 1"	150	350	0,5

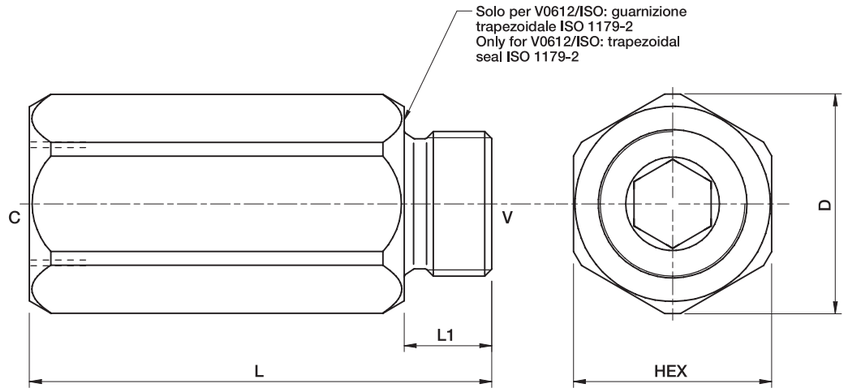

CODICE CODE	SIGLA TYPE	V-C GAS	L mm	L1 mm	HEX mm	D mm	PESO WEIGHT kg
V0612/ISO	VU MF 1/2" ISO 1179-2	G 1/2"	71	14	30	33	0,270
V0625	VU MF 3/4"	G 3/4"	85,5	16	36	40	0,456
V0644	VU MF 1"	G 1"	105	18	41	46	0,650